


Rubber Cables - SOOW

UL Listed , UL flexible cords - UL62, CSA-C. 22
 Tinned and Bare Copper Stranded Conductors
 EPDM Insulation 90C, 600V
 Resists sunlight, water, acid, oil and solvents
 Abrasion resistant
 Extra flexible stranding
 Available custom conductor colors and custom cables

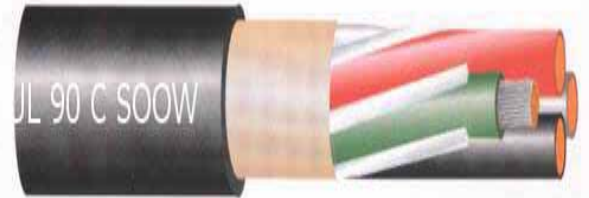

Part No.	AWG/ Strand	No. of Cond.	Insul. Thick “	OD “	Amps*	UL Style
PC-RC -18-3	18 (16x30)	3	0.032	0.365	10	SOOW
PC-RC -18-4	18 (16x30)	4	0.032	0.39	7	SOOW
PC-RC-16-2	16 (26x30)	2	0.032	0.37	13	SOOW
PC-RC-16-3	16 (26x30)	3	0.032	0.39	13	SOOW
PC-RC-16-4	16 (26x30)	4	0.032	0.415	13	SOOW
PC-RC-14-2	14 (41x30)	2	0.045	0.5	18	SOOW
PC-RC-14-3	14 (41x30)	3	0.045	0.53	18	SOOW
PC-RC-14-4	14 (41x30)	4	0.045	0.57	15	SOOW
PC-RC-12-2	12 (65x30)	2	0.045	0.575	25	SOOW
PC-RC-12-3	12 (65x30)	3	0.045	0.6	25	SOOW
PC-RC-12-4	12 (65x30)	4	0.045	0.65	20	SOOW
PC-RC-10-2	10 (105x30)	2	0.045	0.625	30	SOOW
PC-RC-10-3	10 (105x30)	3	0.045	0.66	30	SOOW
PC-RC-10-4	10 (105x30)	4	0.045	0.71	25	SOOW

Source : All Generic Suppliers

Packing : 300 meter / Bulk reels and custom packing

*Amps : Chart is based on Free Air 30°C ambient temp. and is given as a guideline only.

Applications

- ❖ Portable lighting, tools and equipment
- ❖ Motors and associated machinery
- ❖ Machine/power tools
- ❖ Heavy industrial equipment

Please contact us for any additional information

Specifications subject to change